

SHERPA

100

AGRI



Thanks to the width of only 76 cm, the SHERPA 100 Agri-Line can pass through narrow passages. This makes it an ideal machine for work at riding schools and in the stables. The SHERPA 100 Agri-line is a welcome aid for the mucking out and the supply of straw and feed.

Technical data SHERPA 100 Agri



Motor:

Manufacturer:	Honda
Type:	GX390
Capacity (kW/Hp):	8.7/11.7
Revolutions per minute (rpm):	3600
Adjusted amount of revolutions (rpm):	3000
Number of cylinders:	1
Cooling:	Air cooled
Fuel:	Benzine (Euro95)
Fuel tank capacity(l):	6,1

Drive system:

Hydrostatic through 2 hydraulic wheel motors

Speed(km/h):

0-6 (proportional)

Capacity data:

Breakout force (kg):	840
Tractive force (kg):	558
Hydraulic drive system (l/bar):	18/190
Hydraulic working system (l/bar):	18/190
Hydraulic tank capacity (l):	42

Tires:

Standard:	4.00x10
Wide:	n/a
Narrow:	n/a

Brakes:

Braking system	Hydrostatic on 2 rear wheels/ 2 front wheels through chain transmission
Service brake	n/a

Steering:

Type:	Skid steering
Steering angle (°):	n/a

Oscillating system:

Oscillating angle (°):	n/a
------------------------	-----

Electrical system:

Voltage (V):	n/a
Battery capacity(Ah):	n/a

Dimensions (L mm x B mm x H mm, without bucket):

Standard:	1490 x 760 x 1218
Wide:	1490 x 1050 x 1218
Narrow:	n/a


Kerb weight(kg):

537

Tipping loads (kg)*:

Pallet forks low (70% of the tipping load)

Bucket low (50% of the tipping load)

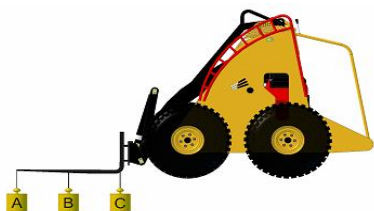

A 130

B 189


C 346



G 135

Pallet forks high (70% of the tipping load)

Bucket high (50% of the tipping load)

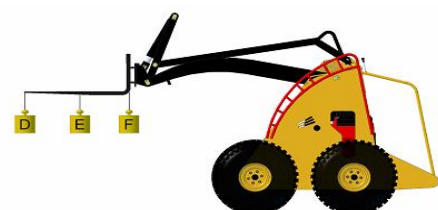

D 88

E 119

F 185



H 85

*(including driver of 60kg)