

GreenMech
The Professionals' Choice




COMBI 200 GUIDE >>>

Combi 200

Key features

- 200mm chipping capacity
- Wide 1430 x 940mm infeed chute
- Toothed Infeed Conveyor 500 x 1200mm
- Remote Control facility
- 45 hp Kubota diesel engine
- Disc-Blade chipping technology
- No-Stress power control
- Bottom Bar safety mechanism
- LED Lights
- Hitch Lock as standard

3 YEAR WARRANTY AS STANDARD



Conveyor-feed for safe and easy loading

200mm Wood and Green Waste Processor

Wherever you're working, whatever type of branches, prunings or green waste you're processing, the Combi 200 will make your life easier. Based on the Arborist 200, it has an added robust conveyor and a massive infeed chute to make loading easy and safe.

The 500 x 1200mm toothed in-feed conveyor feeds into a single horizontal roller via a generous 200 x 400mm throat opening.

The sloping sides of the 1430 x 940mm infeed chute are designed to bring any small in-fed material back to the centre and onto the conveyor belt. The speed of the conveyor and roller are matched and can be easily adjusted.

Power is provided by the 45 hp Kubota diesel unit, featuring automatic tension of the drive belt to deliver optimum engine power transmission to flywheel.

The patented, electronically-controlled No-Stress system doesn't just manage the throughput of material via the rollers and conveyor, but also optimises the available engine power to maximise chipping efficiency.

Combi 200 is fitted with our patented Disc-Blade system, giving up to 150 hours of chipping before any re-sharpening is required and lasting up to 3 times as long as standard straight blades. As a result, Combi 200 can

process up to 7 tonnes of wood per hour or up to 5 tonnes of green waste.

A remote control unit is available to manage the conveyor and roller while the operator is working away from the machine.


Bottom Bar Safety Mechanism, Spare wheel, LED lights and Hitch Locks are fitted as standard equipment.

Built from deep beam, high tensile steel to give the strongest chassis construction, the Combi 200 has been designed and engineered for quality, strength, performance and economy. And when it comes to service and maintenance, the same care has been taken to ensure easy access to the major components.



For your local GreenMech dealer call: **01789 400044** or visit **www.greenmech.co.uk**

	Combi 200
Capacity	200mm
Engine Make	Kubota
Engine	45hp
Fuel	Diesel
Tractor Required	n/a
Chipping Flywheel	Disc Blade
Flywheel Speed	1500rpm
Blades	6
Hydraulic Feed Rollers	Single Horizontal/Conveyor
Turntable	n/a
Power Control	No-Stress
Fuel Capacity (engine)	50 L
Tyre Size (towed)	185/70/R13C
Spare Wheel	Standard
Tonnes per hour	7
Infeed Chute Aperture	1430mm x 940mm
Infeed Throat Size	200mm x 400mm
Discharge Chute	280° Rotation
Hydraulic Oil Capacity	50 L
Clutch	Manual
Hour Meter	On RDS Control Box
Length (transport)	4400mm
Width (transport)	1770mm
Height	2740mm
Weight	1600kg
Sound Power LWA	116dB(A)
Sound Pressure LPA	92dB(A)
Paint Colour	Standard Green or options

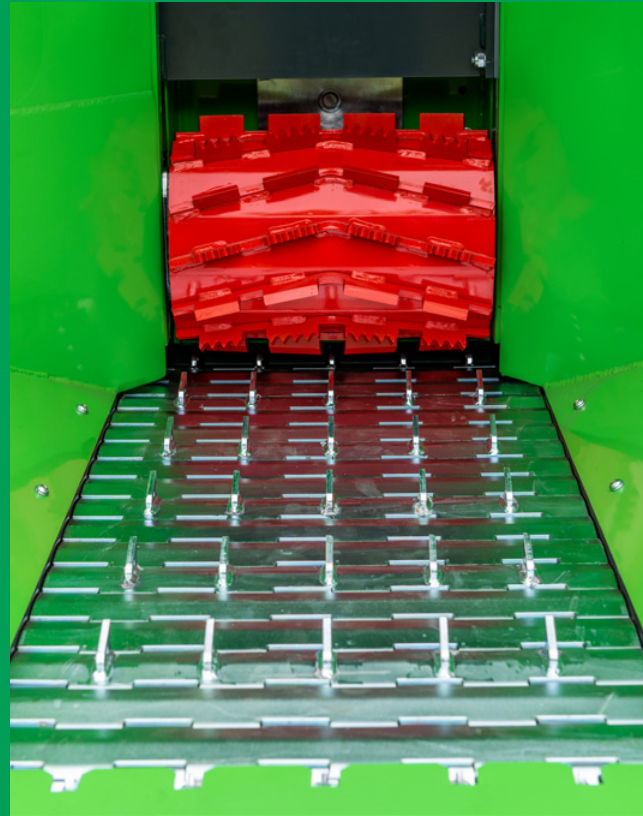

GreenMech

The Professionals' Choice

Please get in contact for further support on GreenMech products

Tel: + 44 (0)1789 400044

Fax: + 44 (0)1789 400167

Email: sales@greenmech.co.uk

Visit: www.greenmech.co.uk

Follow Us: [@GreenMechUK](https://twitter.com/GreenMechUK)

Your authorised GreenMech dealer is:

